

10° CONNECT SYSTEM Art. 23010.CF/.CR/.CRT	Inclination Angle	10°
	Module positioning	Horizontal

FRONT BLOCK ART. 23010.CF

Ballast weight	55 lb	Pallet dimensions	47 1/4 x 31 1/2 - H = 12 63/64
Quantity for pallet	40 pieces	Pallet weight	2200 lb

CENTRAL BLOCK ART. 230010.CR

Ballast weight	99 lb	Pallet dimensions	47 1/4 x 31 1/2 - H = 12 59/64
Quantity for pallet	16 pieces	Pallet weight	1590 lb

TERMINAL BLOCK ART. 230010.CRT

Ballast weight	84 lb	Pallet dimensions	47 1/4 x 31 1/2 - H = 18 1/2
Quantity for pallet	16 pieces	Pallet weight	1345 lb




SYSTEM DETAILS


HORIZONTAL PANEL LAYING

SIDE VIEW

Fixed distance between rows of modules

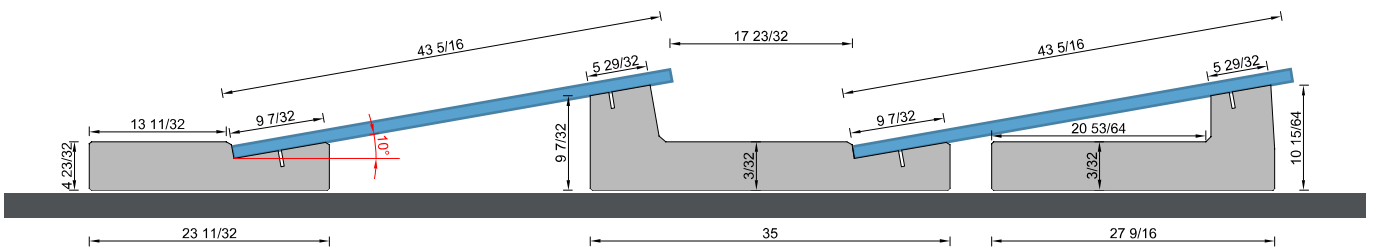

TOP VIEW



Info

- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 1m it is advise to consult our technical department.
- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with M8 bolts in stainless steel use a torque of 12 - 14 Nm.
- Avoid electric screwdrivers.
- We recommended to consult the information indicated in the assembly instructions provided by the panelmanufacturer.
- For any information visit the website www.sunballast.com