5° CONNECT SYSTEM	Inclination Angle	5°
Art. 23005.CF/.CR/.CRT	Module positioning	Horizontal

## FRONT BLOCK ART. 23005.CF

Ballast weight	50 lb	Pallet dimensions	47 1/4 x 31 1/2 - H= 21 21/32
Quantity for pallet	40 pieces	Pallet weight	2000 lb

## **CENTRAL BLOCK** ART. 23005.CR

Ballast weight	97 lb	Pallet dimensions	47 1/4 x 31 1/2 - H= 13 25/32
Quantity for pallet	20 pieces	Pallet weight	1940 lb

### **TERMINAL BLOCK ART. 23005.CRT**

Ballast weight	81 lb	Pallet dimensions	47 1/4 x 31 1/2 - H= 16 17/32
Quantity for pallet	32 pieces	Pallet weight	2600 lb






# SYSTEM **DETAILS**

## HORIZONTAL PANEL LAYING

### SIDE VIEW

#### Fixed distance between rows of modules

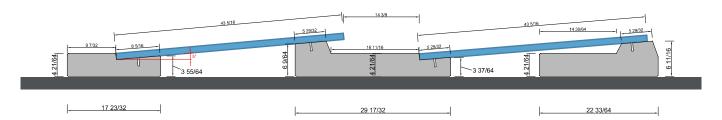

#### **TOP VIEW**





#### Info

- Minimum recommended configuration: 5 rows of 5 panels.
- For short side panel dimensions greater than 39 3/8 we advise you to consult our technical department.
- The torque applied shall refer to the mechanical standard conforming to the bolt in use; with stainless steel M8 bolts use a torque of 12 14 Nm.
- Avoid electric screwdrivers.
- We recommend that you consult the information indicated in the assembly instructions provided by the panel manufacturer.
- For more information visit the website www.sunballast.com